


Attentions:



Vor der Montage bitte diesen Anwendungs- und Montagehinweis gründlich durchlesen.
 Die falsche Montage und Anwendung dieser Geräte könnte zum sachlichen und menschlichen Schaden führen.
 Die Montage ist nur durch einen erfahrenen Elektriker durchzuführen.
 Vor der Installation oder Wartungsarbeit bitte den Strom abschalten!
 Bitte regelmäßig die Fernsteuerung und Empfänger kontrollieren, ob sie funktionsfähig sind.
 Bei Schädigung den Betrieb sofort einstellen.
 Diese Geräte sind nur für den trockenen Innenraum geeignet. Bei der Säuberung ein trockenes Tuch benutzen.
 Die Anwendung von chemischen Reinigungsmitteln ist nicht erlaubt.
 Diesen Anwendungs- und Montagehinweis bitte sorgfältig aufbewahren.

Dimension in mm

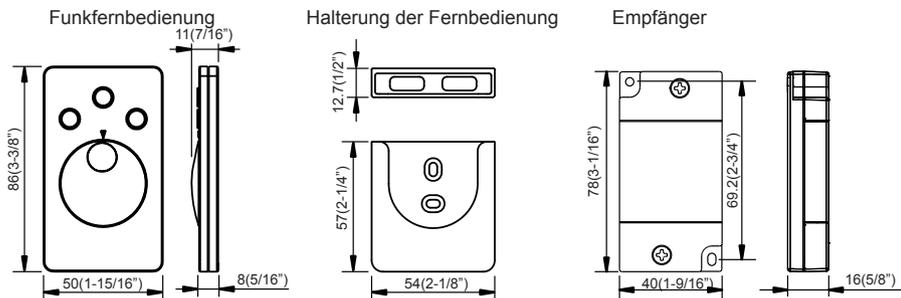



1x 1x 2x 1x 1x 2x

Technische Daten:
 Frequenzbereich: 2.4GHz
 Stromversorgung: Knopfatterie CR2032 (3V)
 Max. Reichweite der Steuerung: ≤15m
 Umgebungstemperatur der Steuerung: 0°C-35°C
 Anwendung für einfarbige LED-Leuchten aller Art in 12V oder 24V W


| Max. Leistung | |
|---------------|-----|
| 12VDC | 36W |
| 24VDC | 72W |

Werkzeug: Schraubendreher

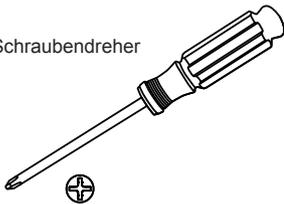


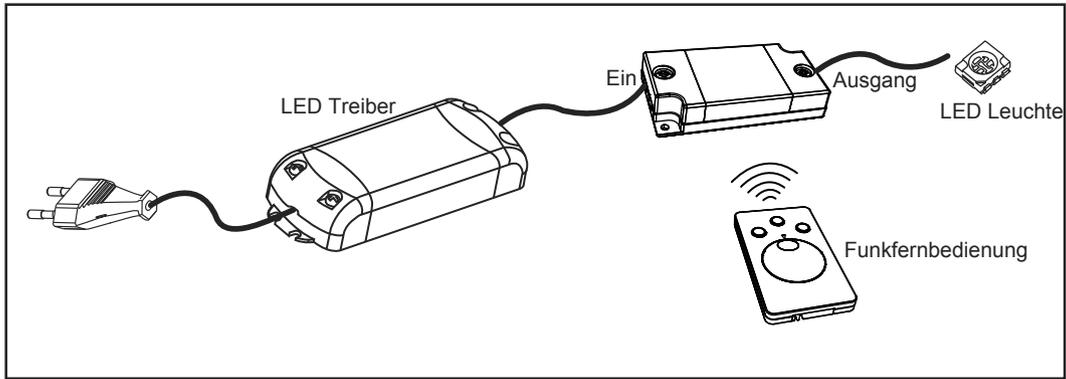


1

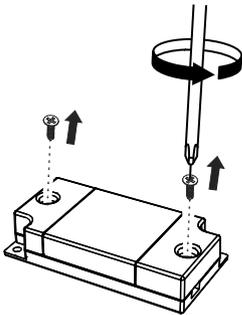


2

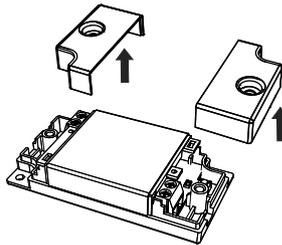


3 Schraube an beiden Seiten lockern

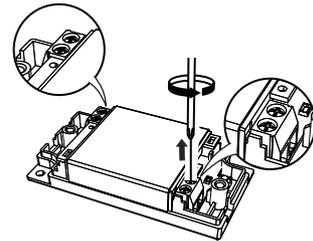


4 An beiden Seiten auf + und - achten.

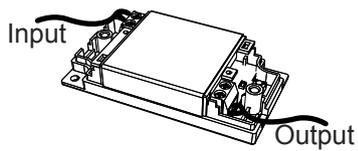


5 Die Schrauben festziehen.

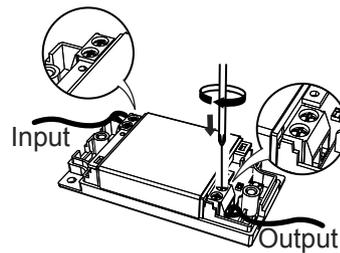


6 Nach dem Anschluss des Stroms die "Gedächtnistaste" drücken.

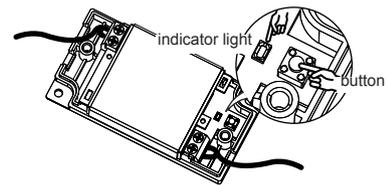


7 Nach 10 Sekunden die Batteriesicherung herausziehen.




8 Das Signallicht erlischt. Die Montage ist erfolgreich erledigt.

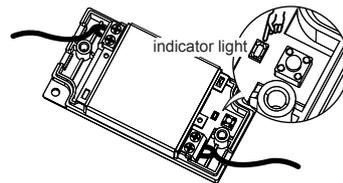


Wenn das Signallicht nach den o.g. Montageschritten weiter brennt, bedeutet dies, dass die Installation fehlgeschlagen ist. In diesem Fall holen Sie die Batterie aus der Fernbedienung und wiederholen die Montageschritte.

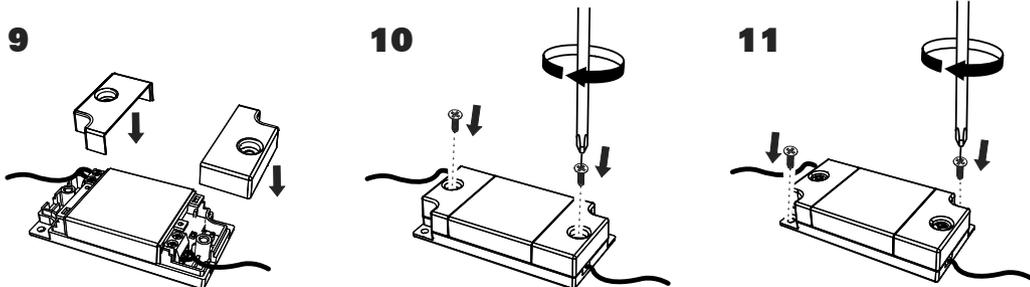


12 Die Montage kann mit Schrauben oder doppelseit. Klebeband erfolgen

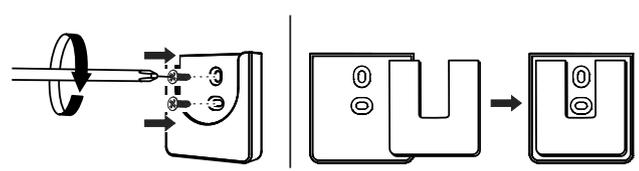

13


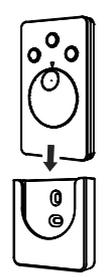


14



! Im Fall, dass die Fernbedienung beschädigt oder verloren gegangen ist, ist diese mit einer Neuen zu ersetzen. Dabei bitte die Montageschritte 6-8 anwenden.

! Jede Fernbedienung hat nur eine einzige Befehlsadresse und kann gleichzeitig mehrere Empfänger (unbeschränkt) mit der gleichen Adresse in der vorgeschriebenen Entfernung steuern. Wenn mehrere Empfänger gleichzeitig funktionieren sollen, sind die o. g. Montageschritte einzuhalten.

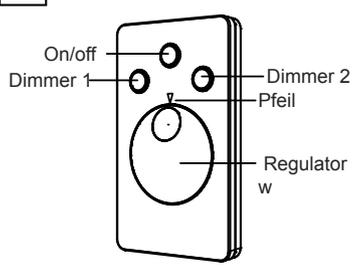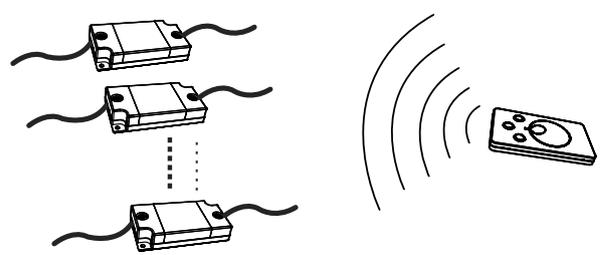

On/off: bei Drücken wird die Leuchte ein- oder ausgeschaltet.
 Regulator: zum Steuern der Helligkeit. Der Pfeil zeigt den momentanen Helligkeitsgrad an.
 Dimmer 1 (max. Helligkeit): beim Drücken erreicht die Leuchte die max. Helligkeit.
 Dimmer 2 (min. Helligkeit): beim Drücken erreicht die Leuchte die minimalste einstellbare Helligkeit.

! Gedächtnisfunktion
 Beim Einschalten der Fernbedienung ist die Helligkeit der Leuchte gleich wie vor dem letzten Ausschalten.

item
 item Industrietechnik GmbH
 Friedenstrasse 107-109
 42699 Solingen
 Germany
 Phone +49 212 6580 0
 Fax +49 212 6580 310
 info@item24.com
 item24.com

Den Anwendungs- und Montagehinweis finden Sie im Internet im Downloadbereich des Produktes.

Attentions:





Read the instruction carefully before installation. non-observance of this instruction may cause damage to the fixture or hurt to human body. The installation must be carried out by a qualified electrician in accordance with local or national codes.
Cut off the power supply before installation and maintenance !

Regularly check the controller , receiver, the cord and other accessories.
If any part is damaged, the product should not be used.

Keep this instruction manual handy for future use


The light source of these product are non-changeable light diodes(LED).
Do not disassemble the product, as the light diode can cause damage to the eyes.
The production is only for indoor and dry location.

Dimension in mm(inch)

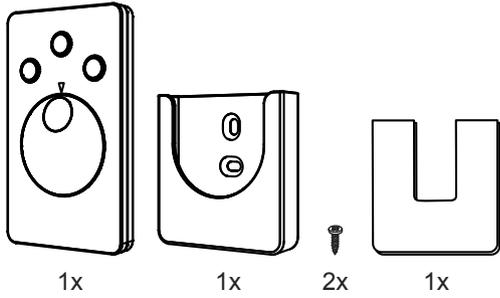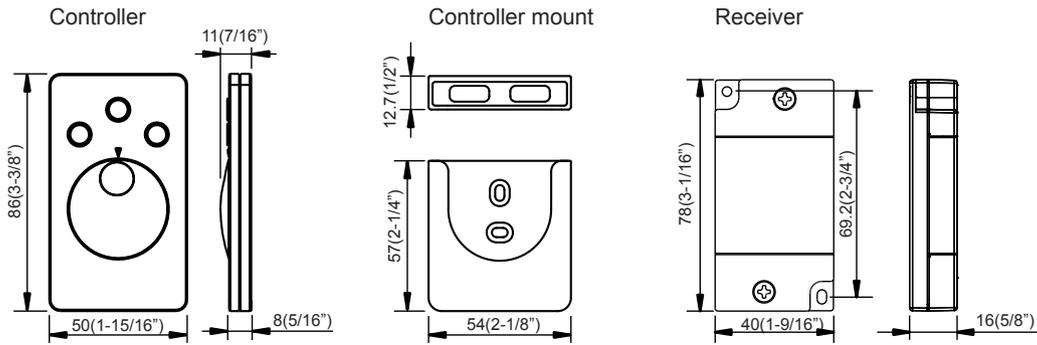


Features:
 Working frequency: 2.4GHz
 Power: CR2032 (3V) button lithium battery
 Remote range: ≤15m
 Ambient temperature: 0°C-35°C
 Apply: single color LED dimmer controller
 Load: DC 12V or 24V LED


| Operation Voltage | Max. Load Power |
|-------------------|-----------------|
| 12VDC | 36W |
| 24VDC | 72W |

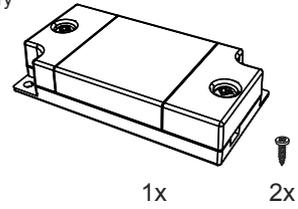


Tools

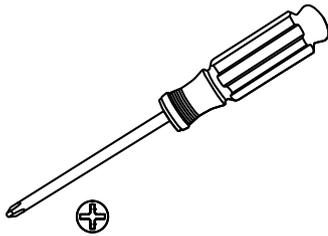


Screwdriver

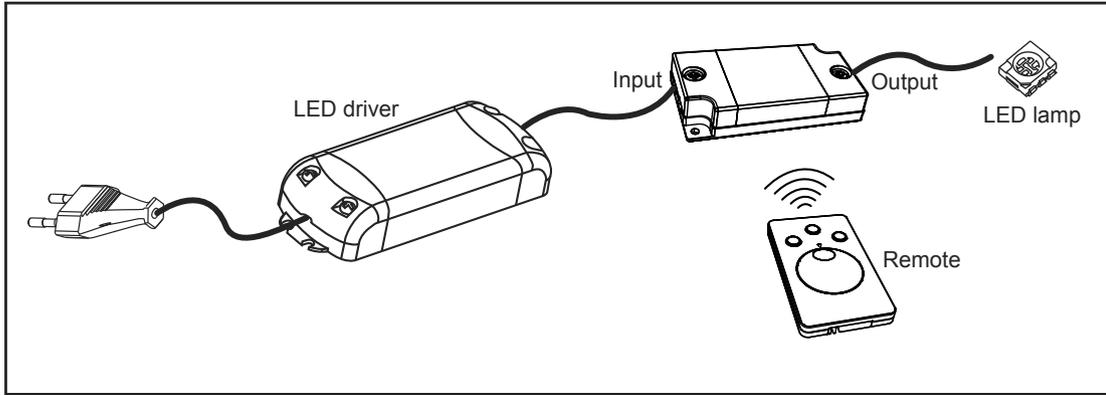


1

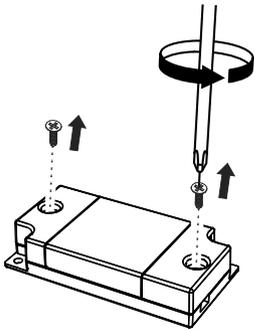


2

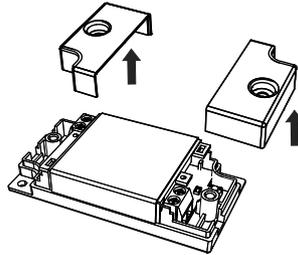


3 Loosen the screw.

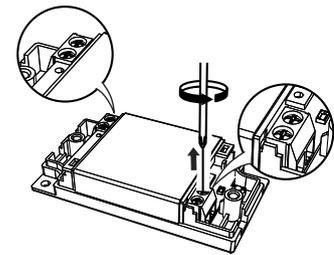


4 Insert the input and output wires.

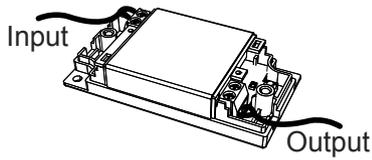

5 Tighten the screw.

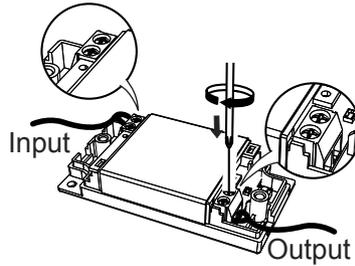


6 Connect the power, press the button until the indicator light comes on.

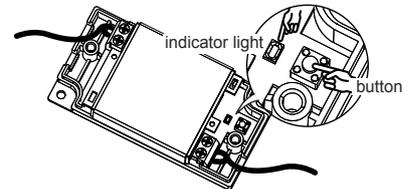


Warning: Pay attention to the polarity of input and output cables, wrong polarity may damage the device.


7 Wait 10 seconds, remove the plastic covering of controller battery.



8 Upon connected, the indicator light should turn off.


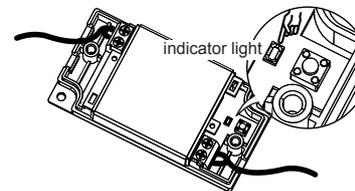


If the light does not go off, remove the controller battery and try again.

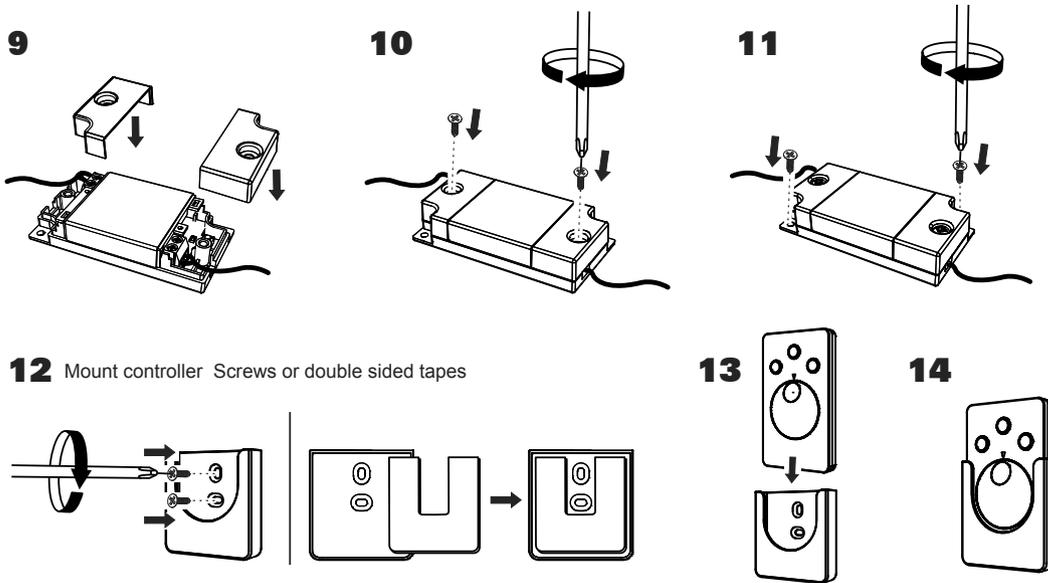

! In case of controller lose or damage, repeat steps 6-8 to connect a new controller.

- !**
1. Each receiver has unique address and will only work with the remote controller of the same address. One controller can be connected to several receivers.
 2. To connect multiple receivers, repeat above steps.

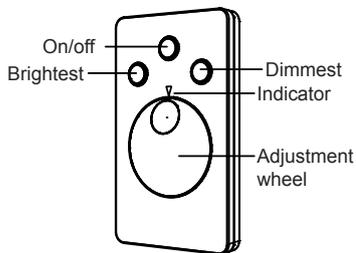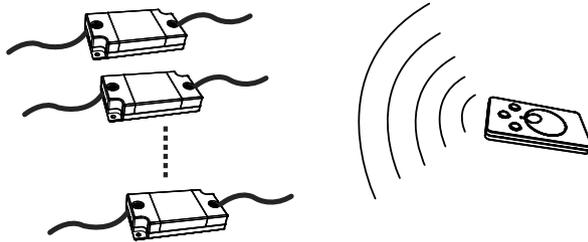

On/off: press once to turn on, again to turn off.
 Adjustment wheel: when adjusting the brightness with the wheel, the arrow will indicate brightness.
 Brightest: pressing this button will set light at brightest level.
 Dimmest: pressing this button will set light at dimmest level.

! **Memory function**
 Upon turn on, light will return to last setting prior to shut off.

item

item Industrietechnik GmbH
 Friedenstrasse 107-109
 42699 Solingen
 Germany

Phone +49 212 6580 0
 Fax +49 212 6580 310

info@item24.com
 item24.com



You find the Notes on Use and Installation online, in the download section for this product.